
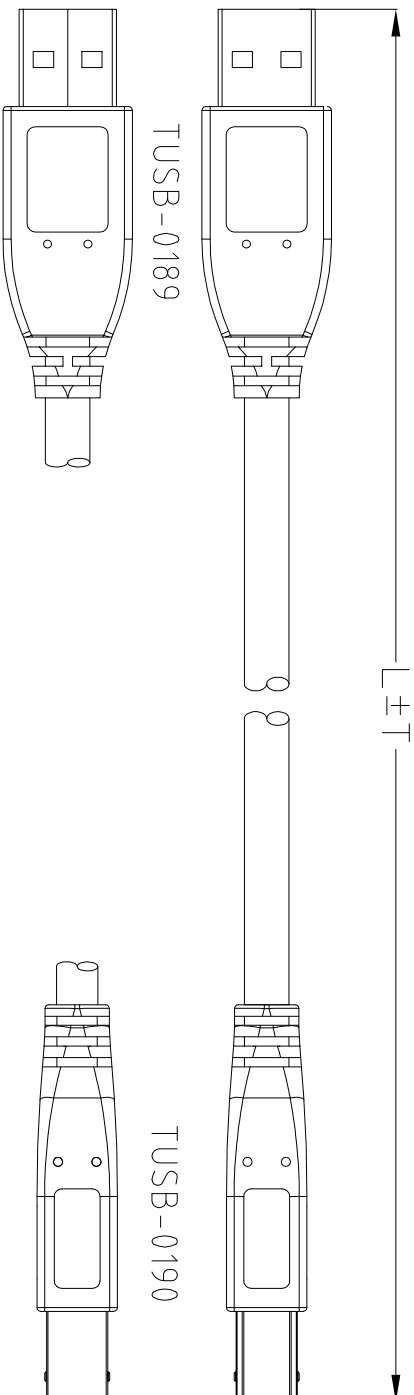



ROHS-COMPLIANT

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)

USB 3.0 B/M 9PIN
INS:BLUE(PT 300C)



NOTE:

1.CABLE: UL -2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)

+AL/My +Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/My+B.D(85%)

PVC JACKET, OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.

2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

P2: USB 3.0 B TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

4.ELECTRICAL TEST:

(1)100% OPEN SHORT & MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 ohm Max.

(3)INSULATION RESISTANCE 10M ohm Min.

(4)HI-POT DC300V

5.PACKING:SEE P-0210

<1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

LTR	REV.	DESCRIPTION	DATE

PIN OUT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	D.W	7
8	PURPLE	8
9	ORANGE	9
	B.D	SHELL

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Title	
USB 3.0 A/M - B/M CABLE	

170-3764-2	CU0025	3000±30	4260113571026
170-3764-1	CU0024	2000±30	4260113571019
DWG	P/N	L±T(mm)	BAR CODE

FANNIE 01/11/10		Customer P/N	
Draw	Engr	App'd	Customer: E-DIR
Scale: NONE	Units: M/M	Third Angle Projection	
Dwg No. 170-3764	REV:A	Sheet:1/1	

2DIRECT GMBH